

## G frames, primed, mild steel

G-kehkyset, pohjamaalattu teräs ▶ Рама G, окрашенная, стальная ▶ G-ramar, lackerat konstruktionsstål ▶ Telai G, in acciaio con prima mano d'antiruggine



Parts needed for a complete solution



Optional



For installation instructions, please see chapter Frame Installation Manual.

RATINGS		Fire: A-Class, EI 60/120, UL1479		Water pressure: 4 bar		Gas pressure: 2.5 bar	
---------	--	----------------------------------	--	-----------------------	--	-----------------------	--

FI	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm) HxW (mm)   HxW (in)		Paino (kg)   (lb)	
RU	Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм) HxW (мм)   HxW (дюйм)		Вес (кг)   (фунт)	
SE	Ram	Ramöppningar	Packnings-utrymme (mm)	Yttermått (D=60 mm) HxW (mm)   HxW (tum)		Vikt (kg)   (lb)	
IT	Telaio	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm) HxW (mm)   HxW (in)		Peso (kg)   (lb)	
GB	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm) HxW (mm)   HxW (in)		Weight (kg)   (lb)	
	<b>G 2x1 primed</b>	1	60 x 120	221 x 241	8.701 x 9.488	3.4	7.562
	<b>G 2x2 primed</b>	2	60 x 120	233 x 383	9.173 x 15.079	5.4	11.905
	<b>G 2x3 primed</b>	3	60 x 120	233 x 514	9.173 x 20.236	7.4	16.248
	<b>G 2x4 primed</b>	4	60 x 120	233 x 644	9.173 x 25.354	9.3	20.591
	<b>G 4x1 primed</b>	1	120 x 120	280 x 241	11.024 x 9.488	4.1	9.039
	<b>G 4x2 primed</b>	2	120 x 120	292 x 383	11.496 x 15.079	6.3	13.977
	<b>G 4x3 primed</b>	3	120 x 120	292 x 514	11.496 x 20.236	8.6	18.938
	<b>G 4x4 primed</b>	4	120 x 120	292 x 644	11.496 x 25.354	10.8	23.898
	<b>G 4x5 primed</b>	5	120 x 120	292 x 775	11.496 x 30.512	13.1	28.858
	<b>G 4x6 primed</b>	6	120 x 120	292 x 905	1.496 x 35.630	15.3	33.797
	<b>G 4+4x1 primed</b>	2	120 x 120	461 x 253	8.150 x 9.961	6.6	14.572
	<b>G 4+4x2 primed</b>	4	120 x 120	463 x 383	8.228 x 15.079	10.5	23.082
	<b>G 4+4x3 primed</b>	6	120 x 120	463 x 514	8.228 x 20.236	14.2	31.305
	<b>G 4+4x4 primed</b>	8	120 x 120	463 x 644	8.228 x 25.354	17.9	39.551
	<b>G 4+4x5 primed</b>	10	120 x 120	463 x 775	8.228 x 30.512	21.7	47.796
	<b>G 4+4x6 primed</b>	12	120 x 120	463 x 905	8.228 x 35.630	25.4	56.019
	<b>G 4+4x7 primed</b>	14	120 x 120	463 x 1036	18.228 x 40.787	29.2	64.264
	<b>G 4+4x8 primed</b>	16	120 x 120	463 x 1166	18.228 x 45.906	32.9	72.509


# G frames, primed, mild steel

G-kehykset, pohjamaalattu teräs ▶ Рама G, окрашенная, стальная ▶ G-ramar, lackerat konstruktionsstål ▶ Telai G, in acciaio con prima mano d'antiruggine

FI	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm)		Paino	
				HxW (mm)	HxW (in)	(kg)	(lb)
RU	Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм)		Вес	
SE	Ram	Ramöppningar	Packnings-utrymme (mm)	HxW (мм)	HxW (дюйм)	(кг)	(фунт)
IT	Telaio		Spazio di riempimento (mm)	Yttermått (D=60 mm)		Vikt	
GB	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm)		Peso	
	<b>G 4+4x9 primed</b>	18	120 x 120	463 x 1297	18.228 x 51.063	36.6	80.732
	<b>G 4+4x10 primed</b>	20	120 x 120	463 x 1427	18.228 x 56.181	40.4	88.979
	<b>G 4+4+4x1 primed</b>	3	120 x 120	631 x 253	24.843 x 9.961	9.1	20.106
	<b>G 6x1 primed</b>	1	180 x 120	338 x 241	13.307 x 9.488	4.8	10.516
	<b>G 6x2 primed</b>	2	180 x 120	350 x 383	13.780 x 15.079	7.3	16.072
	<b>G 6x3 primed</b>	3	180 x 120	350 x 514	13.780 x 20.236	9.8	21.627
	<b>G 6x4 primed</b>	4	180 x 120	350 x 644	13.780 x 25.354	12.3	27.205
	<b>G 6x5 primed</b>	5	180 x 120	350 x 775	13.780 x 30.512	14.9	32.760
	<b>G 6x6 primed</b>	6	180 x 120	350 x 905	13.780 x 35.630	17.4	38.316
	<b>G 6+6x1 primed</b>	2	180 x 120	578 x 253	22.756 x 9.961	8.0	17.527
	<b>G 6+6x2 primed</b>	4	180 x 120	580 x 383	22.835 x 15.079	12.4	27.249
	<b>G 6+6x3 primed</b>	6	180 x 120	580 x 514	22.835 x 20.236	16.6	36.707
	<b>G 6+6x4 primed</b>	8	180 x 120	580 x 644	22.835 x 25.354	20.9	46.142
	<b>G 6+6x5 primed</b>	10	180 x 120	580 x 775	22.835 x 30.512	25.2	55.601
	<b>G 6+6x6 primed</b>	12	180 x 120	580 x 905	22.835 x 35.630	29.5	65.059
	<b>G 6+6x7 primed</b>	14	180 x 120	580 x 1036	22.835 x 40.787	33.8	74.515
	<b>G 6+6x8 primed</b>	16	180 x 120	580 x 1166	22.835 x 45.906	38.1	83.973
	<b>G 6+6x9 primed</b>	18	180 x 120	580 x 1297	22.835 x 51.063	42.4	93.409
	<b>G 6+6x10 primed</b>	20	180 x 120	580 x 1427	22.835 x 56.181	46.7	102.867
	<b>G 6+6+6x1 primed</b>	3	180 x 120	806 x 253	31.732 x 9.961	11.1	24.538
	<b>G 8x1 primed</b>	1	240 x 120	398 x 241	15.669 x 9.488	5.5	12.037
	<b>G 8x2 primed</b>	2	240 x 120	410 x 383	16.142 x 15.079	8.3	18.210
	<b>G 8x3 primed</b>	3	240 x 120	410 x 514	16.142 x 20.236	11.1	24.405
	<b>G 8x4 primed</b>	4	240 x 120	410 x 644	16.142 x 25.354	13.9	30.578

# G frames, galvanized, mild steel

G-kehylset, galvanoitu teräs ▶ Рама G, оцинкованная, стальная ▶ G-ram, galvaniserat konstruktionsstål ▶ Telai G, galvanizzato

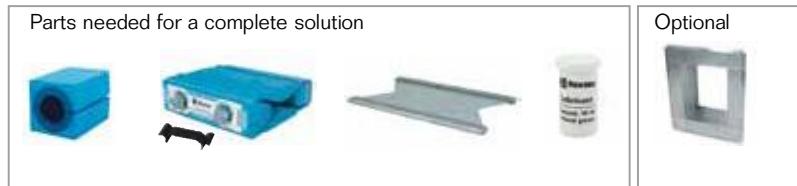

For installation instructions, please see chapter Frame Installation Manual.

RATINGS		Fire: A-Class, EI 60/120, UL1479		Water pressure: 4 bar		Gas pressure: 2.5 bar	
<b>FI</b>	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm) HxW (mm)   HxW (in)		Paino (kg)   (lb)	
<b>RU</b>	Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм) HxW (мм)   HxW (дюйм)		Вес (кг)   (фунт)	
<b>SE</b>	Ram	Ramöppningar	Packnings-utrymme (mm)	Yttermått (D=60 mm) HxW (mm)   HxW (tum)		Vikt (kg)   (lb)	
<b>IT</b>	Telaio	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm) HxW (mm)   HxW (in)		Peso (kg)   (lb)	
<b>GB</b>	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm) HxW (mm)   HxW (in)		Weight (kg)   (lb)	
<b>G 2x1 galv</b>		1	60 x 120	221 x 241   8.701 x 9.488	3.4	7.562	
<b>G 4x1 galv</b>		1	120 x 120	280 x 241   11.024 x 9.488	4.1	9.039	
<b>G 4x2 galv</b>		2	120 x 120	292 x 383   11.496 x 15.079	6.3	13.977	
<b>G 4x3 galv</b>		3	120 x 120	292 x 514   11.496 x 20.236	8.6	18.938	
<b>G 4x4 galv</b>		4	120 x 120	292 x 644   11.496 x 25.354	10.8	23.898	
<b>G 4x5 galv</b>		5	120 x 120	292 x 775   11.496 x 30.512	13.1	28.858	
<b>G 4x6 galv</b>		6	120 x 120	292 x 905   11.496 x 35.630	15.3	33.797	
<b>G 4+4x1 galv</b>		2	120 x 120	461 x 253   18.150 x 9.961	6.6	14.572	
<b>G 4+4+4x1 galv</b>		3	120 x 120	631 x 253   24.843 x 9.961	9.1	20.106	
<b>G 6x1 galv</b>		1	180 x 120	338 x 241   13.307 x 9.488	4.8	10.516	
<b>G 6x2 galv</b>		2	180 x 120	350 x 383   13.780 x 15.079	7.3	16.072	
<b>G 6x3 galv</b>		3	180 x 120	350 x 514   13.780 x 20.236	9.8	21.627	
<b>G 6x4 galv</b>		4	180 x 120	350 x 644   13.780 x 25.354	12.3	27.205	
<b>G 6x5 galv</b>		5	180 x 120	350 x 775   13.780 x 30.512	14.9	32.760	
<b>G 6x6 galv</b>		6	180 x 120	350 x 905   13.780 x 35.630	17.4	38.316	
<b>G 6+6x1 galv</b>		2	180 x 120	578 x 253   22.756 x 9.961	8.0	17.527	


## G frames, galvanized, mild steel

G-kehykset, galvanoitu teräs ▶ Рама G, оцинкованная, стальная ▶ G-ram, galvaniserat konstruktionsstål ▶ Telai G, galvanizzato

FI	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitatt (D=60 mm) HxW (mm)   HxW (in)	Paino (kg)   (lb)	
RU	Rama	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм) HxW (мм)   HxW (дюйм)	Вес (кг)   (фунт)	
SE	Ram	Ramöppningar	Packnings-utrymme (mm)	Yttermått (D=60 mm) HxW (mm)   HxW (tum)	Vikt (kg)   (lb)	
IT	Telaio	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm) HxW (mm)   HxW (in)	Peso (kg)   (lb)	
GB	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm) HxW (mm)   HxW (in)	Weight (kg)   (lb)	
	<b>G 6+6+6x1 galv</b>	3	180 x 120	806 x 253   31.732 x 9.961	11.1   24.538	
	<b>G 8x1 galv</b>	1	240 x 120	398 x 241   15.669 x 9.488	5.5   12.037	
	<b>G 8x2 galv</b>	2	240 x 120	410 x 383   16.142 x 15.079	8.3   18.210	
	<b>G 8x3 galv</b>	3	240 x 120	410 x 514   16.142 x 20.236	11.1   24.405	
	<b>G 8x4 galv</b>	4	240 x 120	410 x 644   16.142 x 25.354	13.9   30.578	

## G frames, acid proof, stainless steel

G-kehykset, haponkestäävä, ruostumaton teräs ▶ Рама G, кислотоустойчивая, нержавеющая сталь ▶ G-ram, rostfritt stål ▶ Telai G, in acciaio inox resistente agli acidi

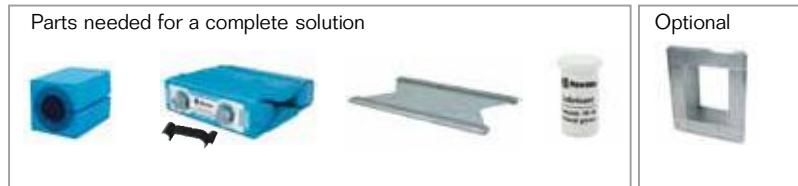

For installation instructions, please see chapter Frame Installation Manual.

RATINGS		Fire: A-Class, EI 60/120, UL1479	Water Pressure: 4 bar	Gas Pressure: 2.5 bar		
FI	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitatt (D=60 mm) HxW (mm)   HxW (in)	Paino (kg)   (lb)	
RU	Rama	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм) HxW (мм)   HxW (дюйм)	Вес (кг)   (фунт)	
SE	Ram	Ramöppningar	Packnings-utrymme (mm)	Yttermått (D=60 mm) HxW (mm)   HxW (tum)	Vikt (kg)   (lb)	
IT	Telaio	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm) HxW (mm)   HxW (in)	Peso (kg)   (lb)	
GB	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm) HxW (mm)   HxW (in)	Weight (kg)   (lb)	
	<b>G 2x1 AISI 316</b>	1	60 x 120	233 x 253   9.173 x 9.961	3.4   7.562	


## G frames, acid proof, stainless steel

G-kehkyset, haponkestäävä, ruostumaton teräs ▶ Рама G, кислотоустойчивая, нержавеющая сталь ▶ G-ram, syrafast rostfritt stål ▶ Telai G, in acciaio inox resistente agli acidi

FI	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm) HxW (mm)   HxW (in)	Paino (kg)   (lb)
RU	Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм) HxW (мм)   HxW (дюйм)	Вес (кг)   (фунт)
SE	Ram	Ramöppningar	Packnings-utrymme (mm)	Yttermått (D=60 mm) HxW (mm)   HxW (tum)	Vikt (kg)   (lb)
IT	Telaio	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm) HxW (mm)   HxW (in)	Peso (kg)   (lb)
GB	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm) HxW (mm)   HxW (in)	Weight (kg)   (lb)
	<b>G 4x1 AISI 316</b>	1	120 x 120	292 x 253   11.496 x 9.961	4.1   9.039
	<b>G 4x2 AISI 316</b>	2	120 x 120	292 x 383   11.496 x 15.079	6.3   13.977
	<b>G 4x3 AISI 316</b>	3	120 x 120	292 x 514   11.496 x 20.236	8.6   18.938
	<b>G 4x4 AISI 316</b>	4	120 x 120	292 x 644   11.496 x 25.354	10.8   23.898
	<b>G 6x1 AISI 316</b>	1	180 x 120	350 x 253   13.780 x 9.961	4.8   10.516
	<b>G 6x2 AISI 316</b>	2	180 x 120	350 x 383   13.780 x 15.079	7.3   16.072
	<b>G 6x3 AISI 316</b>	3	180 x 120	350 x 514   13.780 x 20.236	9.8   21.627
	<b>G 6x4 AISI 316</b>	4	180 x 120	350 x 644   13.780 x 25.354	12.4   27.205
	<b>G 8x1 AISI 316</b>	1	240 x 120	410 x 253   16.142 x 9.961	5.5   12.037
	<b>G 8x2 AISI 316</b>	2	240 x 120	410 x 383   16.142 x 15.079	8.3   18.210
	<b>G 8x3 AISI 316</b>	3	240 x 120	410 x 514   16.142 x 20.236	11.1   24.405
	<b>G 8x4 AISI 316</b>	4	240 x 120	410 x 644   16.142 x 25.354	13.9   30.578

# G frames, technical information

G-kehysten tekniset tiedot • Рама G, техническая информация • G-ramar, teknisk information • Telaio G, informazioni tecniche

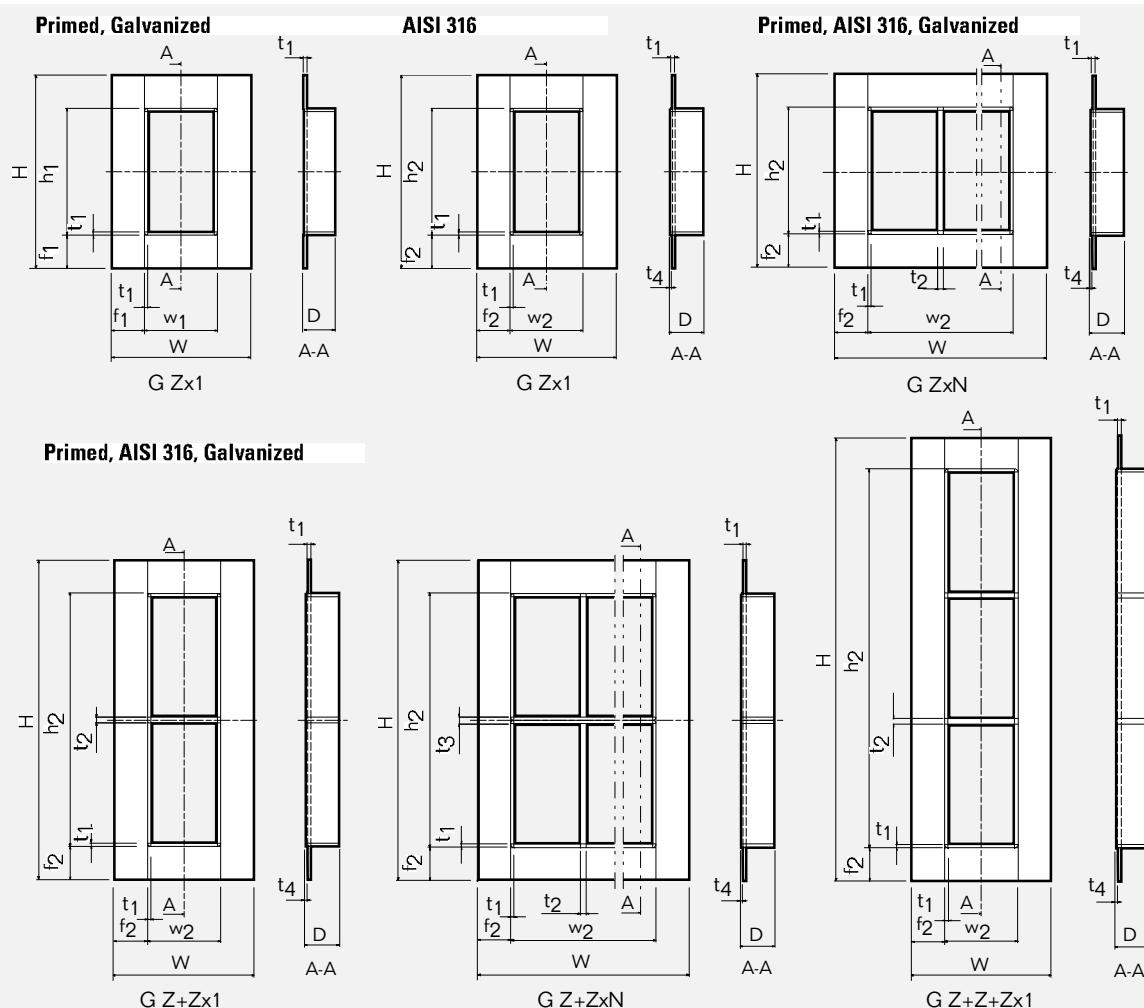

Pos	(mm)	(in)
$h_1$	H - 108	H - 4.252
$h_2$	H - 120	H - 4.724
$w_1$	W - 108	W - 4.724
$w_2$	W - 120	W - 4.724
D	60	2.362
$f_1$	54	2.126
$f_2$	60	2.362
$t_1$	6	0.263
$t_2$	10	0.394
$t_3$	12	0.394
$t_4$	3	0.118

Z = Frame size

N = Number of horizontal openings

Z= Kehyksen koko

N = Aukkojen lukumäärä vaakasuunnassa

Z - Размер рамы

N - Количество проемов/секций по горизонтали

Z = Ramstorlek

N = Antal öppningar i bredd

Z = Grandezza telaio

N = Numero delle aperture orizzontali

Note: All dimensions are nominal values

Huomaa: Kaikki mitat ovat nimellisarvoja

Внимание: Все размеры номинальные

Obs: Alla mätt är nominella

Nota: tutte le dimensioni sono valori nominali